

Manhattan VibroPressed Slabs

Premium Finish Face Mix Technology



24"x36" Natural

Classic paving stone slab, ideal for Pool Areas, Rooftops, Decks, Terraces.

VIBROPRESS TECHNOLOGY

Our state-of-the-art manufacturing process is able to bring the quality of slabs to the next level. The dimensional accuracy and high flexural strength make the Manhattan the go to slab for pedestal installations.



INDIVIDUAL SIZES:



Size (in)	Pieces per sq.ft.	Sq.ft. per Pallet	Shipping Weight	PCS / Pallet
12" x 24" x 2"	0.5	88	1000kg / 2200lbs	44
18" x 18" x 2"	0.44	99	1113kg / 2454lbs	44
18" x 36" x 2"	0.22	99	1113kg / 2454lbs	22
24" x 24" x 2"	0.25	88	1000kg / 2200lbs	22
24" x 36" x 2"	0.17	132	1472kg / 3246lbs	22

All sizes including 3 mm Spacer Bars

RECOMMENDED APPLICATIONS



Patios




Walkways




Decks



Pedestal Set

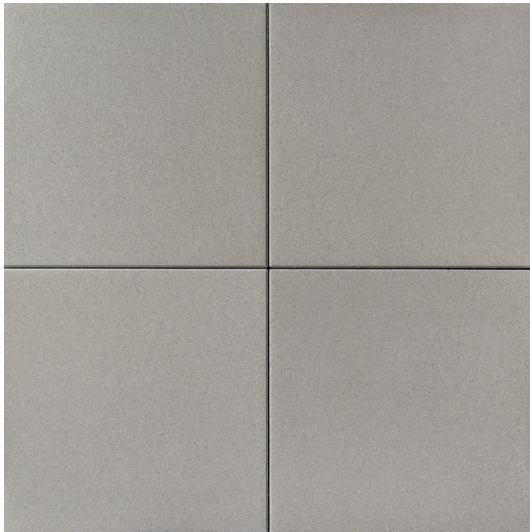


Natural

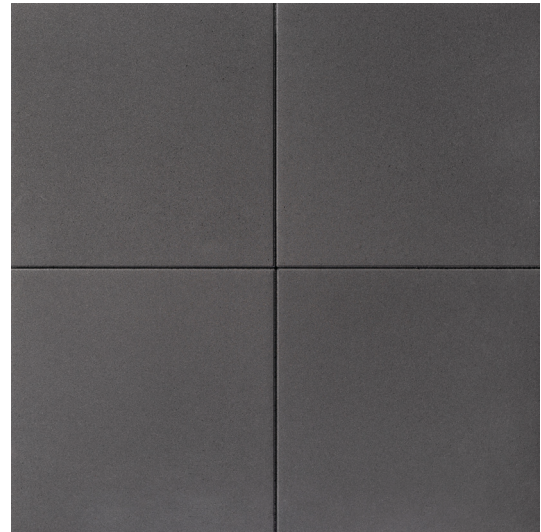

Charcoal




Winter Sky

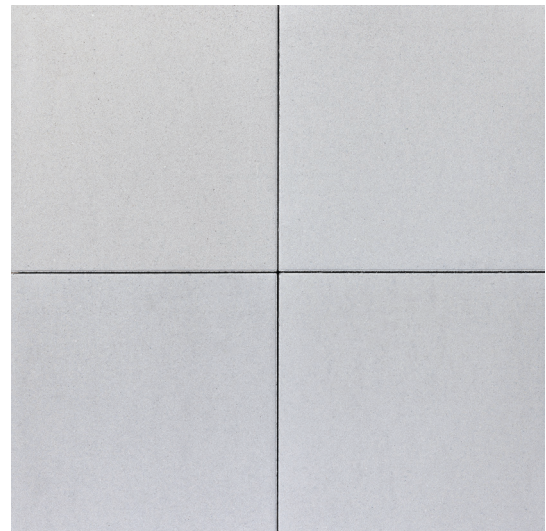

Pearl White



Espresso

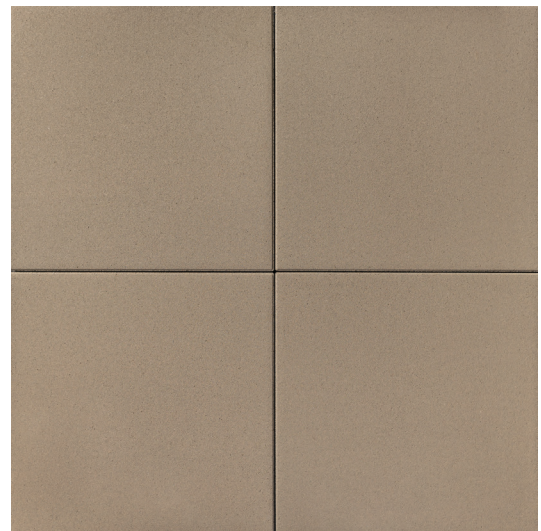


Sierra Beige

Available only in 24"x24" size

Installation Instructions:


Permeable Installation

FULL EXFILTRATION

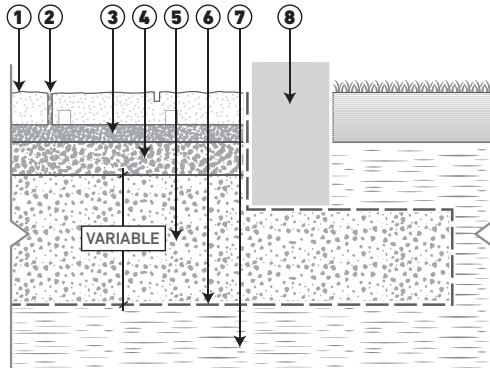


- 1 Slab
- 2 Joint filling material ASTM No 10 (CSA 2-3mm) aggregate
- 3 Bedding course 1 1/5" to 2" (40 to 50 mm) ASTM No 8 (CSA 2.5-10mm) aggregate
- 4 Base course 4" (100mm) ASTM No 57 (CSA 5-28mm) aggregate foundation thickness
- 5 Subbase course ASTM No 2 (CSA 40-80mm) aggregate
- 6 Geotextile (optional)
- 7 Subgrade
- 8 Concrete Edge

Sand Set Installation

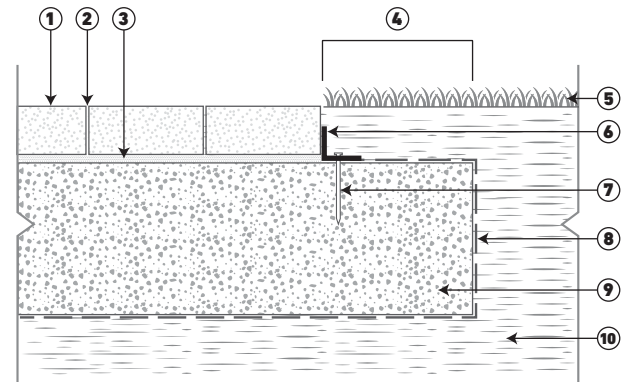

- 1 Slab
- 2 Sand joint fill
- 3 Bedding Sand 1"
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge or other type of edge restraint
- 7 Nail
- 8 Geotextile (optional)
- 9 Compacted aggregate base with 3/4" minus material
- 10 Subgrade

Pedestal Set Installation

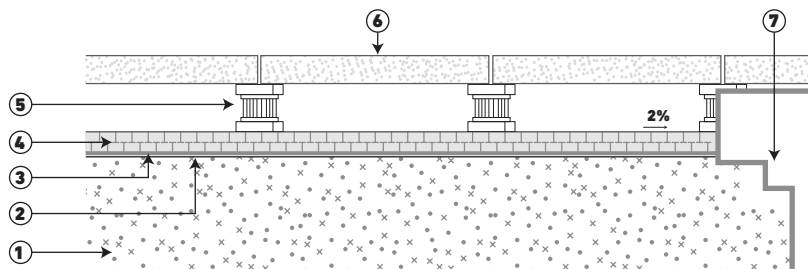

- 1 Structural deck
- 2 Waterproof membrane
- 3 Protection board and/or Drain mat
- 4 Rigid insulation
- 5 Pedestals
- 6 Slab
- 7 Roof drain